UL-2200

STANDARD BOOM
& TYPE 1 TURBIDITY CURTAIN

ENVIRO-USA™

Standard Containment Boom

Control contaminants & drastically reduce the cost of clean up using these industry favorites.

Calm Water Containment Boom Specifications

For no current applications, calm water, and limited tides.

SKU	Float Freeboard	Skirt Draft	Section Length	Float Size	Top Tension Cable	Bottom Ballast Chain	Anchor Point	Section Connectors	Overall Height
705	4 in.	6 in.	50,100, Custom	4 in.	N/A	1/4 in. Galvanized Steel	50 ft. OC	ASTM Mini Bulk Connector	10 in.
720	6 in.	12 in.	50,100, Custom	6 in.	N/A	5/16 in. Galvanized Steel	50 ft. OC		18 in.

Protected Water Containment Boom Specifications

For light current applications, mild water conditions, and some tides.

SKU	Float Freeboard	Skirt Draft	Section Length	Float Size	Top Tension Cable	Bottom Ballast Chain	Anchor Point	Section Connectors	Overall Height
710	5 in.	6 in.	50,100, Custom	4 in.	¼ in.	1/4 in. Galvanized Steel	50 ft. OC	ASTM Mini Bulk Connector	11 in.
725	7 in.	12 in.	50,100, Custom	6 in.	5/16 in.	5/16 in. Galvanized Steel	50 ft. OC		19 in.
730	7 in.	18 in.	50,100, Custom	6 in.	5/16 in.	5/16 in. Galvanized Steel	50 ft. OC		25 in.

Open Water Containment Boom Specifications

For fast current applications, offshore applications, and frequent tides.

SKU	Float Freeboard	Skirt Draft	Section Length	Float Size	Top Tension Cable	Bottom Ballast Chain	Anchor Point	Section Connectors	Overall Height
735*	12 in.	19 in.	50,100, Custom	11 in.	5/16 in.	5/16 in. Galvanized Steel	50 ft. OC	ASTM Mini Bulk Connector	31 in.
740*	12 in.	25 in.	50,100, Custom	11 in.	5/16 in.	5/16 in. Galvanized Steel	50 ft. OC		37 in.

*Permeable skirt and stainless steel hardware available upon request.

Standard Boom colors include yellow, grey, blue and black

Type 1 - Light-Duty and Department of Transportation (DOT) Turbidity Curtain

An economical solution for containing silt, turbidity and displaced particles. Designed for calm water, no waves and low silt levels. Standard sizes available for quick turnaround times.

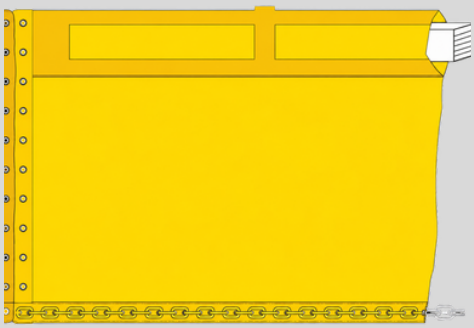

Specifications

Length: 50 ft. and 100 ft., Custom Lengths Available *(Light Duty Available in 25 ft.)*
Skirt Draft Depths: 5 ft. Standard *(3 ft. - 10 ft.)*
Fabric Material: PVC Coated Polyester - *DOT = 18 oz., Light Duty = 14 oz.*
Float Type: Square Foam Filled Flotation
Float Size: 4 in. (Contractor) or 6 in. (DOT)
Top Tension Cable: N/A
Bottom Ballast Chain: DOT = 1/4 in. Galvanized Steel Chain
Light Duty = 3/16 in. Galvanized Steel Chain
Section Connectors: Grommets
Color: Yellow
Anchor Point: Reinforced End Grommets at the Waterline