


TURBIDITY CURTAIN - TYPE 3



ENVIRO
-USA™

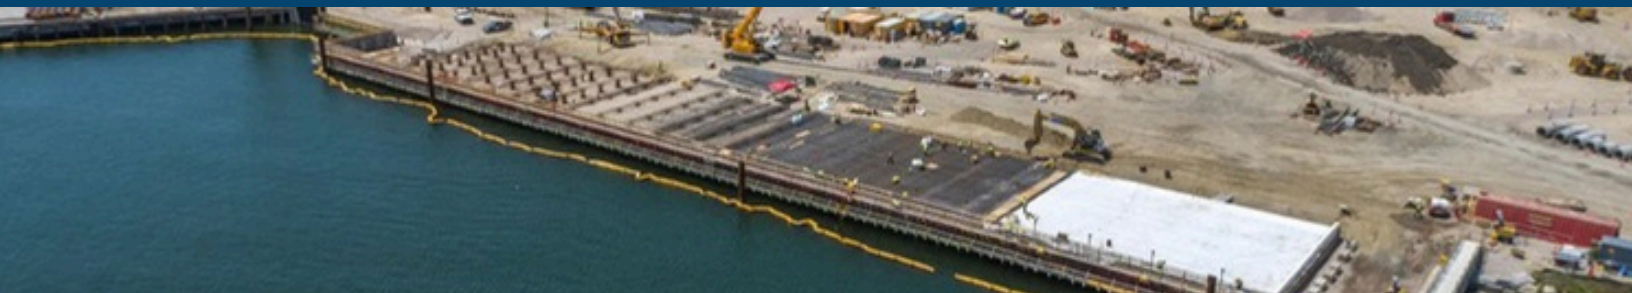


Provides a high-strength solution for containing silt, turbidity and displaced particles. Designed for fast water, waves, or demanding conditions with flows up to 3 knots. Includes 5/16 in. vinyl-sheathed galvanized steel cables, square buoyancy floats, and ASTM Universal Slide Connectors for maximum structural integrity during dredging, shoreline restoration, and marine construction. Customizations available to meet your specific project needs.

Type 3 - DOT Permeable Turbidity Curtain

Specifications


Length:	50 ft. and 100 ft.
Skirt Draft Depths:	5 ft. Standard (3 ft. - 20 ft. <i>Available by Request</i>)
Fabric Material:	18 oz. PVC Coated Polyester with Monofilament
Float Type:	Square Foam Filled Flotation
Float Size:	8 in.
Top Tension Cable:	5/16 in. Galvanized Steel Cable Sheathed in Vinyl
Bottom Ballast Chain:	5/16 in. Galvanized Steel Chain
Section Connectors:	Grommets
Color:	Yellow
Anchor Point:	Every 50 ft. with Top and Bottom Stress Plates

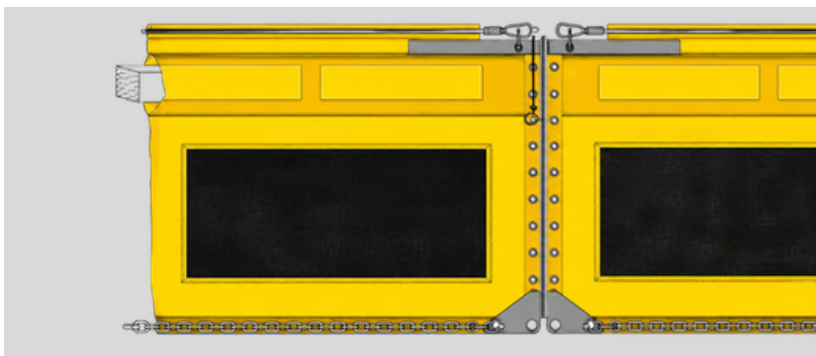

Type 3 - Heavy-Duty (HD) Turbidity Curtain

Specifications


Length:	50 ft., Custom Lengths Also Available
Skirt Draft Depths:	5 ft. Standard (3 ft. - 100 ft. <i>Available by Request</i>)
Fabric Material:	22 oz. PVC Coated Polyester
Float Type:	Square Foam Filled Flotation
Float Size:	12 in.
Top Tension Cable:	Dual - 5/16 in. Galvanized Steel Cable
Bottom Ballast Chain:	3/8 in. Galvanized Steel Chain
Section Connectors:	ASTM Universal Slide, Stress Plates, Grommets
Color:	Yellow
Anchor Point:	Every 50 ft.

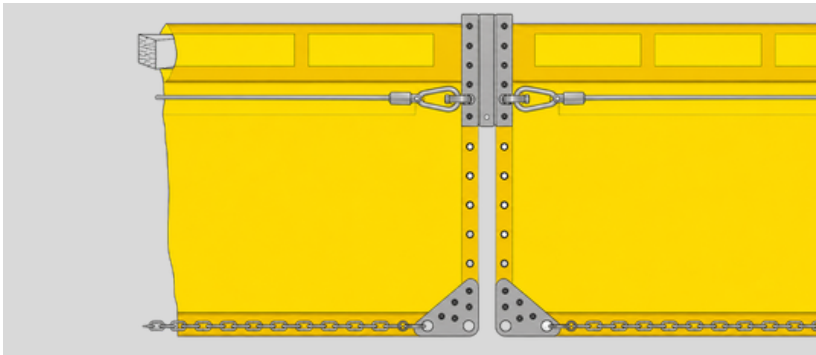

Type 3 - Heavy-Duty (HD) Permeable Curtain

Specifications

Length:	50 ft., Custom Lengths Also Available
Skirt Draft Depths:	5 ft. Standard (3 ft. - 100 ft. <i>Available by Request</i>)
Fabric Material:	22 oz. PVC Coated Polyester with Monofilament
Float Type:	Square Foam Filled Flotation
Float Size:	12 in.
Top Tension Cable:	Dual 5/16 in. Galvanized Steel Cable Sheathed in Vinyl
Bottom Ballast Chain:	3/8 in. Galvanized Steel Chain
Section Connectors:	ASTM Universal Slide, Stress Plates, Grommets
Color:	Yellow
Anchor Point:	Every 50 ft.

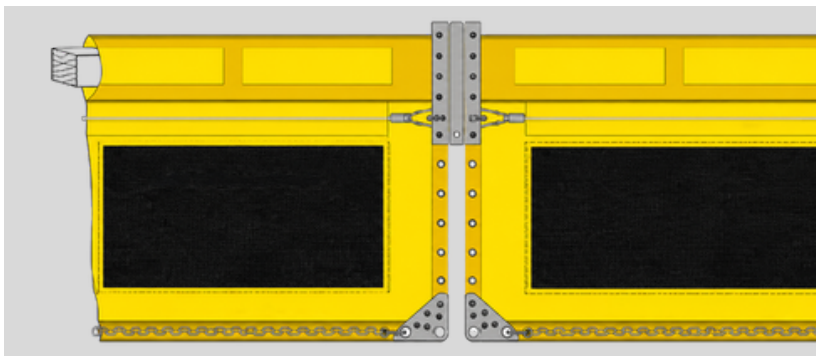

Natural forces such as current, wind, waves, and location affect the product and may require engineering, additional anchoring, and customization.