




50 in. Heavy-Duty (HD) Sargassum Boom

Specifications

Overall Height:	50 in.
Length:	50 ft., Custom Lengths Available
Float Freeboard:	13 in.
Skirt Draft Depth:	36 in.
Fabric Material:	22 oz. Impermeable Blue PVC w/Mesh Permeable Skirt
Top Tension Cable:	Dual SS Top Tension Cables (<i>Above & Below Float</i>)
Bottom Ballast Chain:	1/2 in. Stainless Steel Chain
Section Connectors:	ASTM Universal Slide Connector
Hardware:	Stainless Steel
Anchor Point:	25 ft. On Center
Color Options:	Blue Standard

(Green, Black, Yellow, and Orange Available by Request)

Our sargassum containment barriers protect your site, shoreline, and the local environment by collecting, diverting, and controlling floating pollutants in the water.

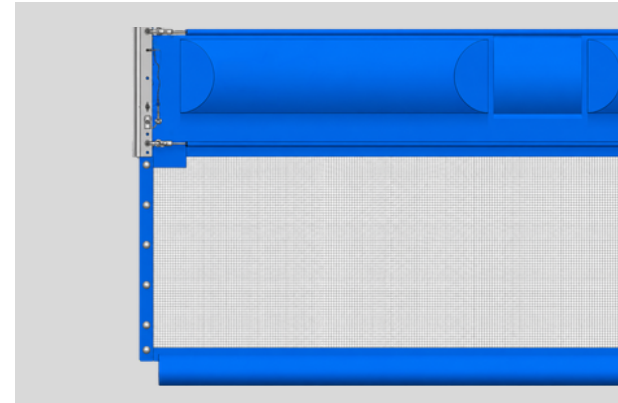


Sargassum Boom

Specifications

Overall Height:	31 in. or 37 in.
Length:	50 ft., 100 ft., Custom Lengths Available
Float Freeboard:	12 in.
Skirt Draft Depth:	19 in. and 24 in.
Fabric Material:	22 oz. Impermeable Reinforced PVC
Top Tension Cable:	5/16 in. Galvanized or Stainless Steel
Bottom Ballast Chain:	5/16 in. Galvanized or Stainless Steel
Section Connectors:	ASTM Universal Slide Connector
Hardware:	Galvanized/Stainless Steel Hardware
Anchor Point:	50 ft. On Center
Color Options:	Blue Standard

(Green, Black, Yellow, and Orange Available by Request)

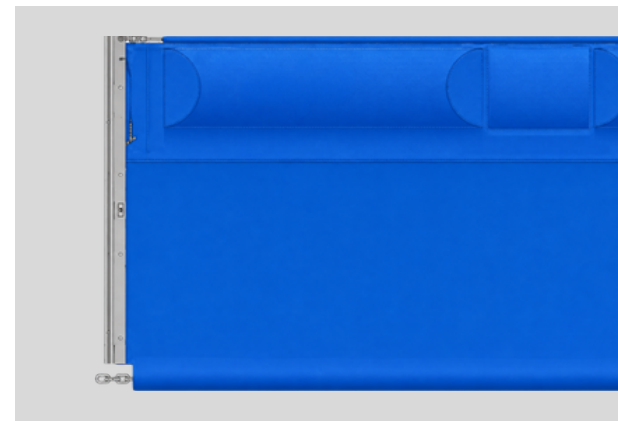

PERM Boom

High buoyancy, long-term solution for containment of many forms of floating debris and seaweed in areas where long-term solutions may be needed. They are able to withstand extensive use in calm open water conditions, presenting significant cost savings.

Specifications

Available Height:	18 in., 24 in., 36 in.
Length:	50 ft., 100 ft., Custom Lengths Available
Float Type:	High-Impact Bolt-On Floats
Fabric Material:	175 oz. PVC Coated Polyester
Connectors:	ASTM Universal Slide Connector
Bottom Ballast:	Ballast Weights
Float Color Options:	Blue, Orange, Black

